DOWNDRAFT COLLECTION SIMPLY GENIUS





This technology offers pleasant natural lighting and faithfully reproduces the colour of the illuminated items at just 2W.



Allows the hood to be switched on for 24 hours a day for continuous air renewal with a level of noise that is imperceptible.



Double boost and 5 suction speeds operated by touch slider controls.



Filter saturation alarm: warns you when it is time to clean the anti-grease filter or substitute the anti-odour filter.



A high performance filter that reduces extraction by 15% and lasts twice as long as standard filters.



The hood will turn on at the most suitable speed automatically, adapting the extraction capacity to the maximum cooking level.



Allows automatic delayed switching off of the motor to complete elimination of residual odours.



Waterproof motor technology, which guarantees normal functioning and complete safety even if large quantities of liquid are spilled on the hob.



Bridge Zones allow you to adjust the size of your cooking zone to suit your requirements.



Reduces the perceived sound by 25%. This aspiration guarantees optimised effectiveness.



The motors compact design also means that it is the only product in its class that leaves enough free space for a drawer to be fitted beneath.



85% power consumption (kW/h) at medium-low speeds that are most often used. It is the most silent motor on the market.



Energy Diffuser: it reduces noise up to 3dB(A) and highers hood efficiency by 30% even in the presence of long air outlet.



The Evo diffuser has an optimised geometry that results in excellent energy efficiency, reduced power consumption and noise level.



The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen.



Function which activates maximum aspiration for 6 minutes to meet special cooking needs.



Faber hoods with electronic commands come with remote controls, which are particularly useful for people with reduced mobility.



Galileo has a min-max timer function to allow for perfect cooking performance.



The hood and hob form a superbly efficient duo, characterised by attention to detail and amazing performance. Touch slider controls are complemented by maximum power, total safety and silence.

AIR MATTERS

For most people, air is something intangible, an ethereal free spirit. But at FABER, we know how to weigh it, measure it, work with it and shape it just like a solid material. After all, we've been working with air for over 60 years. Our innovative technology improves the quality of air and with it the quality of life, giving you a greater sense of well-being and bringing comfort and harmony into your home.





GALILEO

15



The hood and hob form a superbly efficient duo, characterised by attention to detail and amazing performance. Touch slider controls are complemented by maximum power, total safety and silence.



SIMPLY GENIUS

The Galileo hood, named after a true Italian genius, is a jewel of technology in energy efficiency class A+++, and the top of Faber's induction range.

Double boost and 5 suction speeds.

Invisible but extremely functional, Galileo is a perfect combination of hood and hob in a single, worktop-height package.







Galileo stands out for its waterproof motor technology, which guarantees normal functioning and complete safety even if large quantities of liquid are spilled on the hob.



6 / FABER

GALILEO CAN FIT IN 60 CM DEEP WORKTOP

Only

AUTOMATIC FUNCTION The hood will turn on at the most suitable speed automatically, adapting the extraction capacity to the maximum cooking level.

To deactivate this function simply press the key A, later it can be started up again by pressing the same control and the LED "A" will light up.









7 / FABER





GALILEO - FAGO83BG

HOOD FEATURES

FINISH Black glass/Cast iron grid


Controls Touch slider

GREASE FILTER Dishwasher safe filters

Ø OF AIR OUTLET

ENERGY CLASS

Accessories Charcoal filter FO1CF14



HOB FEATURES

FINISH Black glass

PRODUCT DIMENSIONS LXW (MM) 830x520

RECESS DIMENSIONS LXW (MM) 802x492

INDUCTION ZONE 4 2100-3700 W single 4200-7400 W bridged

Controls Touch slider

Power (W) 7400

Voltage (V) 220-240

FREQUENCY (HZ) 50/60

HOOD PERFORMANCE

Speed	MAX	INT	T BOOST	
AIR CAPACITY IEC POINT	470	590	700	
Pressure	350	590	800	
Ινρυτ	65	110	145	
Noise level	66	73	76	

INDUCTION HOB FUNCTIONS

Bridge Zones	2
Power Settings (stages)	9
Timer min-max	1-59 min.
Booster (P)	Yes
AUTO SWITCH OFF	Yes
OVER TEMPERATURE PROTECTION	Yes
Voltage abnormality protection	Yes
CONTAINER DETECTION SYSTEM	Yes
AUTOMATIC SHUTDOWN PROTECTION	Yes
Power On Indicator	Yes
Childlock	Yes

8 / FABER



INSTALLATION OPTIONS







Lateral ducting version installation





Front recycling version installation


STANDARD INSTALLATION

TECHNICAL DRAWING


FLUSH FIT INSTALLATION

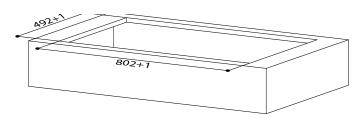



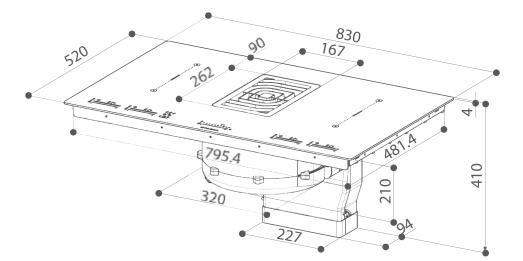



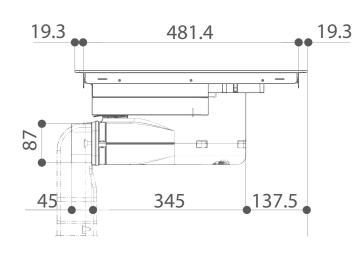



	ЕПЕ енергия - ех		
FABER	П		
A++ A+ A B C		A++	
E			
		XYZ kWh/annum)
\bigcirc		<u>م</u>	
ABCDEFG	ABCDEFG A	BCDEFG YZ dB	
65/2014			

ENERGY LABEL FOR CLEARER SAVINGS.

Energy Efficiency Class: hoods with the highest ratings (A++, A+, A) consume less and are more respectful of the environment (green colour).

Annual Electricity Consumption: calculated for standard hood functioning times (60 minutes of suction and 120 minutes of lighting a day).

Fluid-dynamic efficiency: reveals the quality and power of the hood: efficiency rises as suction power increases or energy consumption decreases.

Lighting efficiency: this indicates how much light the hood produces for the energy it consumes; for the same lighting power, more lightefficient hoods consume less.

Filter efficiency: indicates the filter's capacity to capture grease.

Noise level: measured in dB at the hood's maximum fan speed (not boost).









Fabula Plus 900 mm - FAFA90BG

FEATURES

Finish Glass / Stainless Steel

CONTROLS EVO touch controls


LIGHTING LED light

PERFORMANCES

Grease filter Dishwasher safe filters	Speed	1	2	3	4	INT
Ø of air outlet 150 / 120 mm	AIR CAPACITY IEC POINT	160	290	350	439	700
Width 900 mm	Pressure	100	390	460	540	560
	Ινρυτ	55	120	155	210	270
Energy class A	Noise level	40	53	54	60	70

ACCESSORIES

F01CF09 Charcoal filter F05RC1 Remote control F01CF13 Special filter ensures humidity does not remain in the cabinet



EXTERNAL MOTOR OPTION

***This product is also available to order with an external motor option

900 mm - External motor option - FAFA90BGEM



Flanagan Fittings **Falcon House Dublin Airport Logistics Park** St. Margarets Co. Dublin K67 F303 Ireland.

Telephone +353 (0)1 844 8400

Fax

+353 (0)1 844 8009

E-mail sales@fff.ie


Web

www.fff.ie









FlanaganFittings